




Basic Portable System

Applications Notes

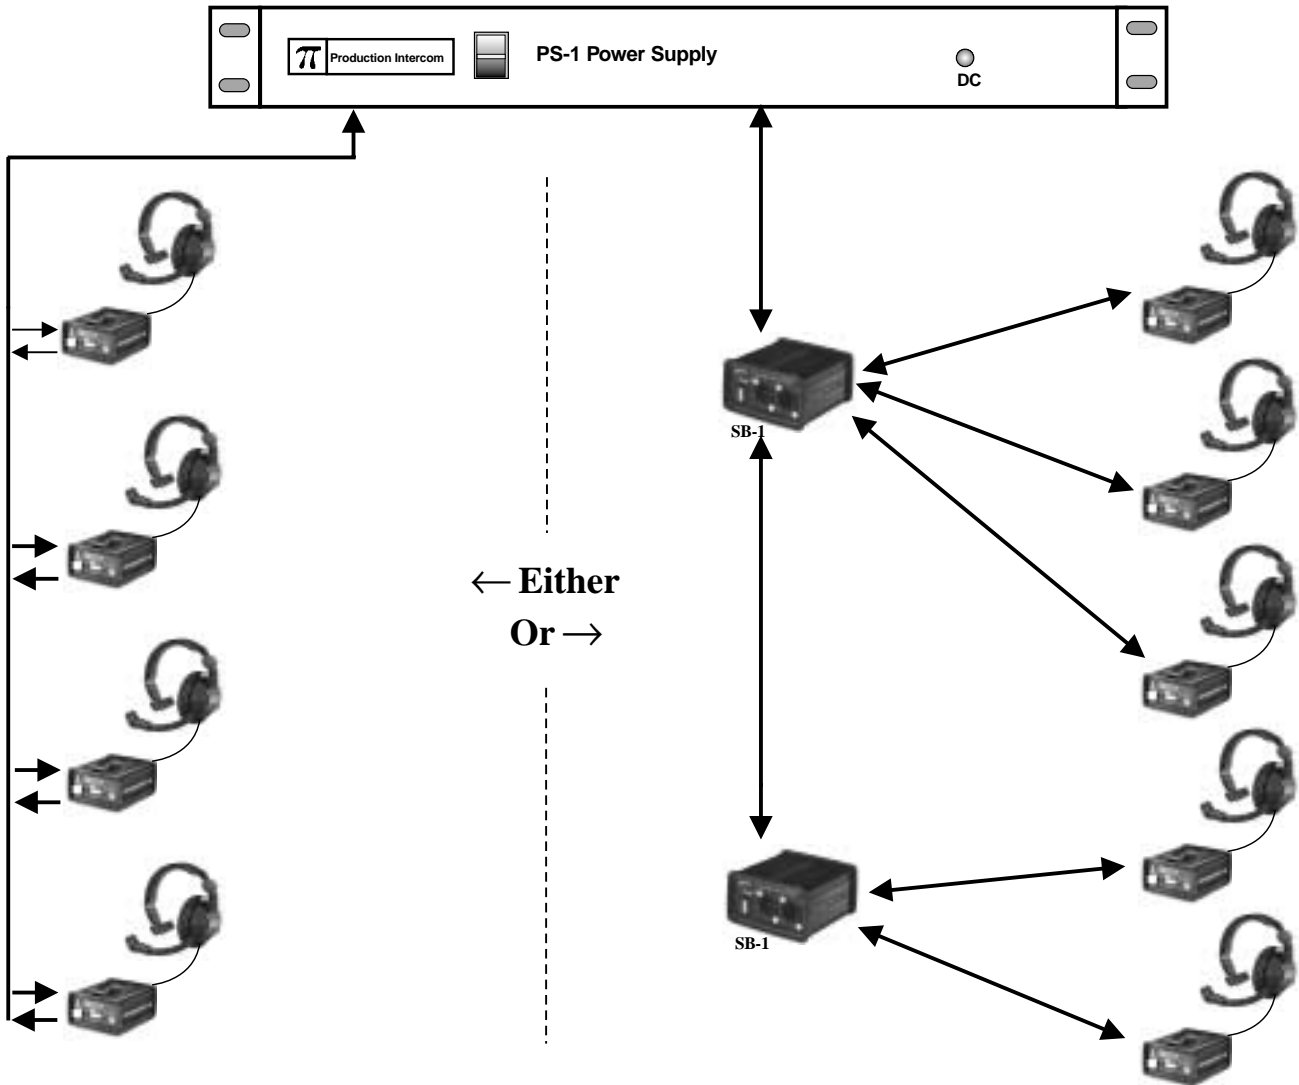

The PS-1 is a simplified low-cost version of the PS-2. It has the same critical components and supplies the same 2 amps of current. It lacks the front panel switching facilities of the PS-2 and has only one output XLR on the rear panel. It does have the LED indicator for DC, and the power switch does light to indicate that the unit is On. Stations can be connected as shown on the left, by daisy-chaining from one station to the next. Many users find the two cables connected to each station (when daisy-chaining) to be awkward. Using SB-1 Splitter-Isolators, as shown on the right, eliminates this inconvenience at moderate cost.

Production Intercom Inc.

P.O. Box 3247, Barrington, IL 60011-3247

Voice: (847) 381-5350 Fax: (847) 381- 4360 Sales/Technical Assistance (US & Can): (800)